


# J32100 S-RACE® Tacky Ultra 100

## Microporous Coated Sublimation Paper

### Printability

- simplex printable

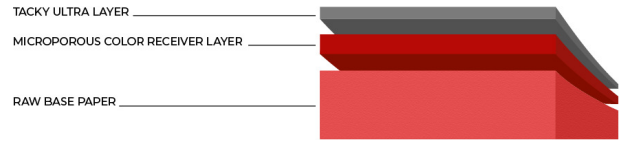

### Product Specification

| Property  | Test Method    | Dimension        | Target | Tolerance |
|-----------|----------------|------------------|--------|-----------|
| Weight    | DIN EN ISO 536 | g/m <sup>2</sup> | 103    | ± 5       |
| Thickness | DIN EN ISO 534 | µm               | 125    | ± 6       |
|           | DIN EN ISO 536 | mil              | 4.9    | ± 0.25    |

### Printing Technology

-  Sublimation water-based systems

### Certificates

- FSC on request

### Key Applications

- NEW: With stronger tack level (adhesive capabilities)
- Transfer on all kinds of polyester textiles
- Especially designed for elastic textiles. No movement between paper and fabric during transfer (eliminates possible ghosting effect)
- For medium to high ink coverage

### Benefits & Properties

- Optimal tack between paper and fabric during sublimation transfer (no ghosting)
- Extremely fast drying
- Excellent line sharpness
- Superb and quick transfer properties
- Outstanding lay-flat performance
- Exceptional quality consistency

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](http://felix-schoeller.com)



**FELIX SCHOELLER**